


PHILIPS
WiZ CONNECTED

Xitanium

LED driver

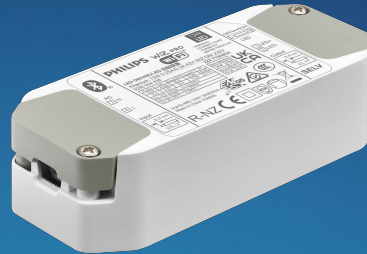

Datasheet

Xitanium LED drivers – WiZ wireless

Xitanium 13W 0.25/0.3A 42V WiZ DM 230V

9290 034 83806

Enabling easy, scalable connected lighting system for creating welcoming space

Xitanium wireless LED drivers are designed to operate LED solutions for general lighting applications. They enable simple, cost effective wireless lighting system for energy saving and comfort. Advanced design of the wireless drivers helps to build a simple, scalable and standardized connected lighting with different functionalities from simple wireless dimming to cloud based operations and integration with gateways.

WiZ Wireless drivers can be configured via smart devices with WiZ app as standalone or in a mesh network. With Xitanium LED drivers, flexibility in luminaire design is assured thanks to the Adjustable Output Current (AOC). The adjustable output current also enables operation of various LED PCB solutions from different manufacturers.

Benefits

- Easy wireless dimming and scheduling for energy saving and convenience
- Instant setup, wireless commissioning in bulk via Bluetooth. No Wi-Fi connection required
- Simple wireless control and automation with control accessories (remote, sensor, switch...)
- Connecting to Wi-Fi for cloud-based control and remote access. No gateway needed
- Future-proof flexibility, support OTA (Over-The-Air) firmware update
- Large array of integrations to work with major home assistant systems
- High reliability underpinned by 5-year warranty

Features

- Wi-Fi + Bluetooth dual protocols, enabling both wireless and cloud-based control
- Include WiZ Pro software suite:
 - Setup app for installers to conduct effortless commissioning
 - WiZ app for end users to control and automate with ease
 - WiZ Dashboard for building managers to perform advanced setting, get actionable usage insights for preventive maintenance and energy optimization
- Wide range of power ratings
- WiZ Pro software:
<https://www.wizconnected.com/en/pro/getstarted>

Application

- Residential
- Hospitality
- Retail
- School
- Leisure places

Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage range	220...240	V _{ac}	Performance range
Rated input voltage range	198...264	V _{ac}	Operational safety range
Rated input voltage	230	V _{ac}	
Rated input frequency range	50...60	Hz	Performance range
Rated input current	0.07	A	@ full output power @ rated input voltage
Max. input current	0.09	A	@ rated output power @ minimum performance input voltage
Rated input power	15.5	W	@ full output power @ rated input voltage
Power factor	0.9		@ rated output power @ rated input voltage
Total harmonic distortion	20	%	@ rated output power @ rated input voltage
Efficiency	≥ 84	%	@ full output power @ rated input voltage
Input frequency AC range	47.5...63	Hz	Performance range
Standby Power	0.5	W	
Isolation input to output	SELV		

Electrical output data

Data below applies to each separate output channel

Specification item	Value	Unit	Condition
Regulation method	Constant Current		
Output voltage	30...42	V _{dc}	
Output voltage max.	60	V	Maximum output voltage (rms)
Output current	0.25/0.3	A	
Output current min programmable	No		
Output current min dimming	25	mA	12.5mA at night mode
Output current tolerance	± 7.5	%	
Output current ripple LF	≤ 4	%	Ripple = peak / average, < 3kHz
Output current ripple HF	≤ 15	%	
Output power	7.5...12.6	W	
Number of output channels	1		

RF data

Specification item	Value	Unit	Condition
Work mode	BLE Bluetooth: 4.2		
	Wi-Fi: 802.11b/g/n		
Work frequency	BLE: 2.4...2.4835	GHz	
	Wi-Fi: 2.4...2.4835	GHz	
Modulation mode	BLE: GFSK		
	Wi-Fi: CCK/DSSS/OFDM		
RF output power	BLE: 8	dBm	
	Wi-Fi: 20	dBm	
Rx sensitivity	BLE: -97	dBm	
	Wi-Fi: -98	dBm	11b 1M
	Wi-Fi: -74	dBm	11g 54M

Electrical data controls input

Specification item	Value	Unit	Condition
Control method	Wireless		Wireless protocol = WiFi, BLE
Dimming range	10...100	%	Dimming via WiZ app, 5% at night mode
Isolation controls input to output	SELV		acc. IEC61347-1

Wiring and Connections

Specification item	Value	Unit	Type
Input wire cross-section	0.75...1.5 / 18...16	mm ² / AWG	Type250 (Independent), solid / stranded wire
Input wire strip length	8.5...9.5	mm	
Output wire cross-section	0.2...1.5 / 24...16	mm ² / AWG	Type250, solid / stranded wire
Output wire strip length	8.5...9.5	mm	
Maximum cable length	0.3	m	Total length of wiring including LED module, one way




Insulation

Insulation per IEC61347-1	Input	Output
Input		SELV
Output	SELV	

Dimensions and weight

Specification item	Value	Unit	Tolerance (mm)
Length (A1)	115	mm	
Mounting hole distance (A2)	105	mm	
Width (B1)	45	mm	
Width (B2)	23.7	mm	
Height (C1)	29	mm	
Mounting hole diameter (D1)	3.2	mm	
Weight	81.5	gram	
Housing color	White		

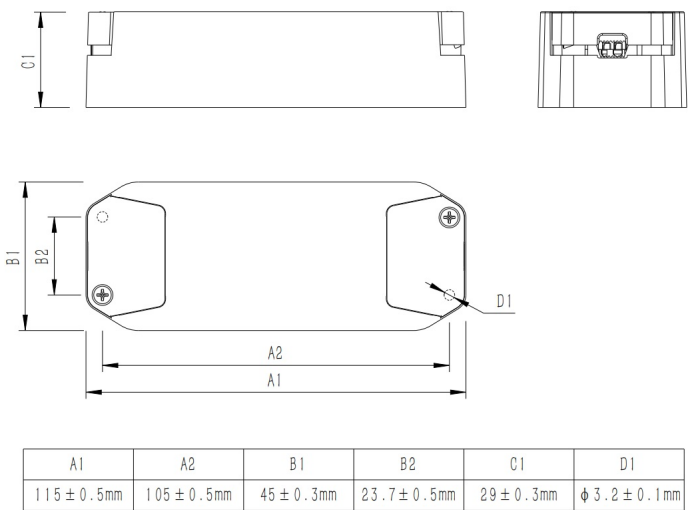

Logistical data


Specification item	Value
Product name	Xitanium 13W 0.25/0.3A 42V WiZ DM 230V
Logistic code 12NC	9290 0348 3806
Pieces per box	48

Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-20...+50	°C	Higher ambient temperature allowed as long as Tcase-max is not exceeded
Tcase-max	85	°C	Maximum temperature measured at Tcase-point
Tcase-life	70	°C	Measured at Tcase-point
Maximum housing temperature	130	°C	In case of a failure, inherent by design
Relative humidity	10...90	%	Non-condensing

Lifetime

Specification item	Value	Unit	Condition
Driver lifetime	50,000	hours	Measured temperature at Tcase-point is Tcase-life. Maximum failures = 10%

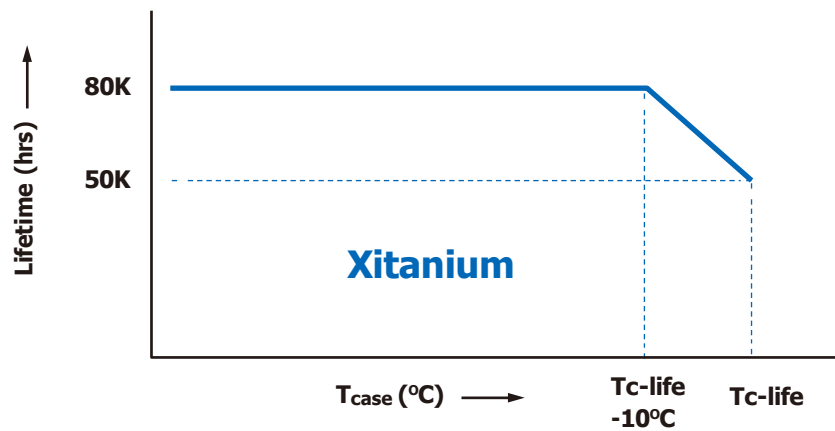

Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25...+85	°C	
Relative humidity	5...95	%	Non-condensing

Programmable features


Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	DipSwitch	200 mA	via DipSwitch
Adjustable Light Output (ALO)	No		
Min dim level	Yes	10 %	
Corridor mode	No		
FlexTune	No		

Features

Specification item	Value		Condition
Open load protection	Yes		Automatic recovering
Short circuit protection	Yes		Automatic recovering
Over power protection	Yes		Automatic recovering
Hot wiring	No		
Suitable for fixtures with protection class	II		per IEC60598
Energy metering	No		
Diagnostics	No		

Inrush current

Specification item	Value	Unit	Condition
Inrush current I _{peak}	3.69	A	Input voltage V
Inrush current T _{width}	31.5	µs	Input voltage V, measured at 50% I _{peak}
Drivers / MCB 16A type B	≤ 115	pcs	Indicative value

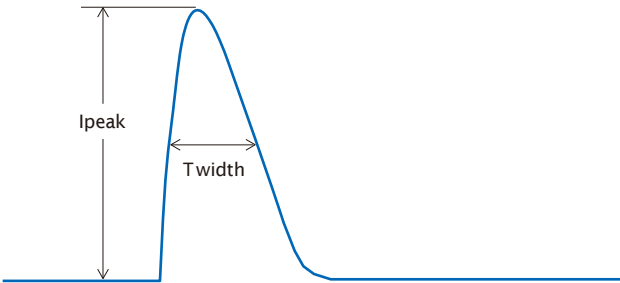

MCB	Rating	Relative number of LED drivers
B	4A	25%
B	6A	40%
B	10A	63%
B	13A	81%
B	16A	100% (stated in datasheet)
B	20A	125%
B	25A	156%
B	32A	200%
B	40A	250%
C	4A	42%
C	6A	63%
C	10A	104%
C	13A	135%
C	16A	170%
C	20A	208%
C	25A	260%
C	32A	340%
C	40A	415%

Driver touch current / protective conductor current

Specification item	Value	Unit	Condition
Typical Touch Current (ins. Class II)	0.7	mA peak	Acc. IEC61347-1. LED module contribution not included

Surge immunity


Specification item	Value	Unit	Condition
Mains surge immunity (di . mode)	1	kV	Acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us
Mains surge immunity (comm. mode)	2	kV	Acc. IEC61000-4-5. 12 Ohm, 1.2/50us, 8/20us

Application Info


Specification item	Value
Approval marks	CE / ENEC /CCC / RCM / UKCA / R-NZ / SELV / BLE / WIFI / SRRC (CMIIT ID: 2021DP7941)
Ingress Protection classification (IP)	20
Noise and hum dB(A)	20

Graphs


Operating window

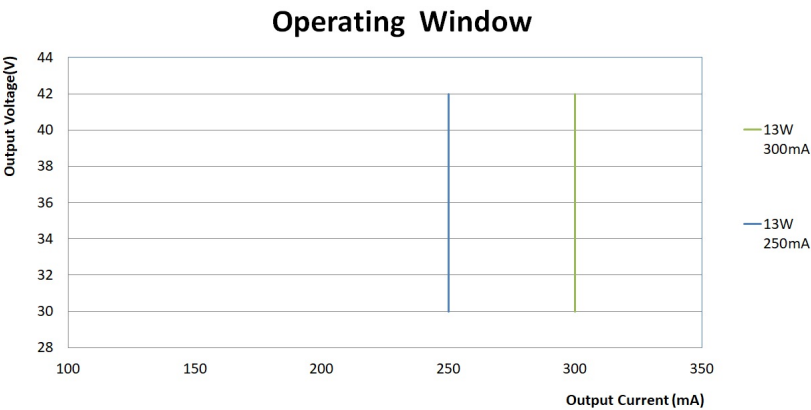


Power factor versus output power

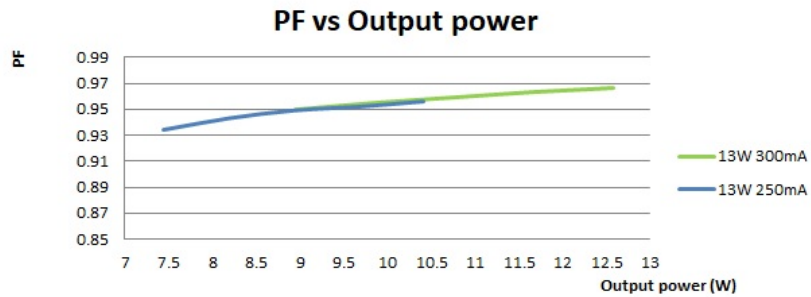

Efficiency versus output power

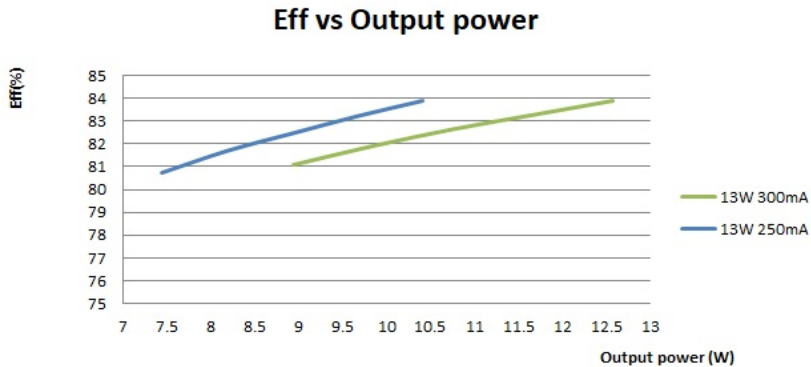

THD versus output power

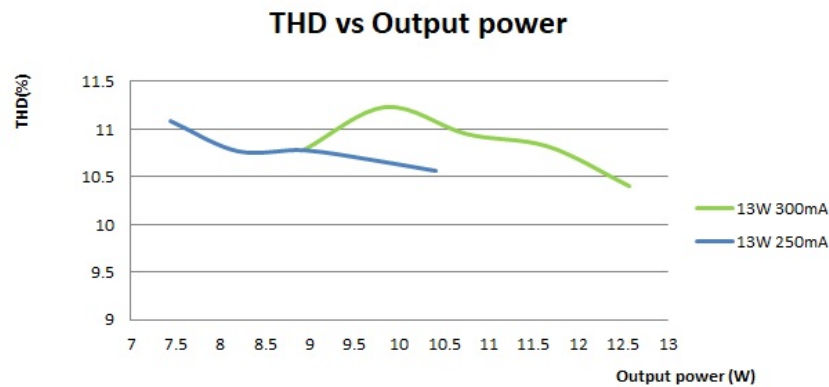

The information in this datasheet is accurate at the time of writing. All data and specification is subject to change.

This datasheet is provided “as is” without express or implied warranty of any kind, it is based on the data of this new product. Neither Signify nor its agents assume any liability for inaccuracies in this guide or losses incurred by use or misuse of the information in this guide.

Signify will not be liable for any indirect, special, incidental or consequential damages (including damages for loss of business, loss of profits or the like), whether based on breach of contract, tort (including negligence), product liability or otherwise, even if Signify or its representatives have been advised of the possibility of such damages.

Signify desires to provide, and the customer identified below (“Customer”) desires to receive, limited prototypes of this product listed in this document (“Products”) at no charge and free-of-cost. In consideration of receiving the Products at no charge and free-of-cost, Customer agrees to assume, and does assume, all risk and liability for the use of the Products and its employees’ and agents’ use of the Products, and that Signify shall have no liability to Customer with respect to Customer’s use, or the performance of, of the Products.

We like you to contact Signify and report problems, suggestions towards a prototype of this product, and provide suggestions regarding this New Product. Signify has no obligation whatsoever to respond in any way to such a problem report or suggestion but will evaluate to any feedback as possible improvement.

The customer shall not sell or otherwise provide a Prototype to any third party.

